


OUTPOWER THE GRAVITY

ELS LIFT

Q SERIES

SCISSOR LIFTS

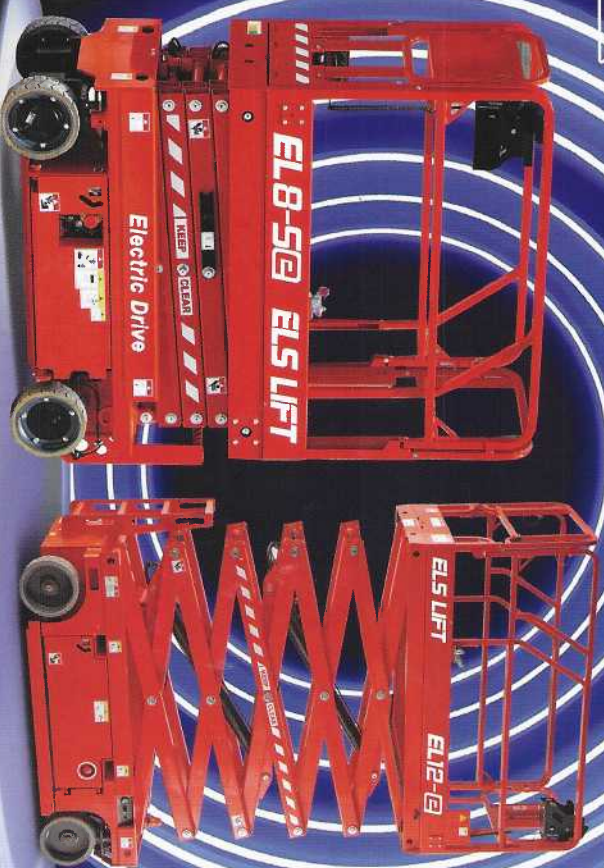

TECHNICAL SPECIFICATIONS

	ELB-50	EL12-B
Maximum Lifting Capacity	230 kg	300 kg
Maximum Lifting Capacity (Platform Extension)	120 kg	150 kg
Maximum Occupants (Indoor / Outdoor)	2 / 1 personnel	2 / 1 personnel
Gradeability	25%	25%
Turning Radius (Inside / Outside)	0 / 1,84 m	0 / 2,58 m
Platform Lifting / Descent Time (Loaded Condition)	32 s / 30 s	60 s / 50 s
Driving Speed (Closed Position / Open Position)	4,5 km / 0,6 s	4,5 km / 0,6 km
Tyres Dimensions (DIA * W)	Solid 318 * 108 mm	Solid 381 * 127 mm
Hydraulic Tank Capacity	15 L	27 L
Batteries	4 * 6 V / 225 A/h	4 * 6 V / 315 A/h
Battery Charger Input	100 V - 240 AC	100 V - 240 AC
Battery Charger Output	30 A	30 A
Powerpack	24 V DC / 4,5 kW / 3,8 cc	24 V DC / 4,5 kW / 3,8 cc
Working Slope (X - Y)	2° - 3°	2° - 3°
Drive Mode	Front Wheels WD	Front Wheels WD
Brake	Rear Wheels	Rear Wheels
Weight	1620 kg	2900 kg

TECHNICAL DIMENSIONS

Working Height	7,6 m	12 m
Platform Height	5,6 m	10 m
Stowed Height (Platform)	1,08 m	1,34 m
Machine Stowed Height (Guardrails Open)	2,19 m	2,44 m
Machine Stowed Height (Guardrails Close)	1,70 m	1,80 m
Chassis Ground Height (Pothole Open)	0,02 m	0,02 m
Chassis Ground Height (Pothole Close)	0,06 m	0,12 m
Chassis Width	0,76 m	1,15 m
Wheelbase	1,37 m	1,86 m
Length	1,68 m	2,31 m
Length With Access Steps	1,83 m	2,47 m
Platform Width	0,78 m	1,14 m
Platform Length	1,70 m	2,31 m
Platform Extension Length	0,86 m	1 m

EL12-B



EL12-B



ELB-50

